


Thermo Scientific Cimarec i Mini Stirrers

Mini stirrers are designed to work in the tiniest of places

- No larger than a thumbnail, ideal for stirring cuvettes
- Stir speeds up to 1400 rpm
- Stir volumes up to 5 mL
- Choose from two different control units (your choice included)

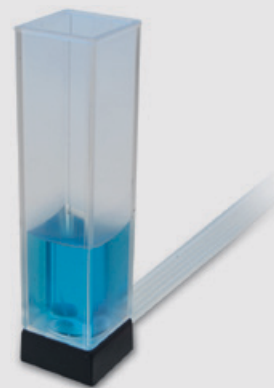

Cimarec i Mini

Model	Part Number	Voltage/Plug Type	Speed (rpm)	Protection Class	Power Settings (W)	Dimensions WxDxH (mm)	Weight (kg)
Mini w/ Telemodul	50088130	230 V Euro	130-1000	IP68 (stirrer only)	0.1	12 x 12 x 5	0.02
Mini w/ Telemodul	50088132	230 V UK	130-1000	IP68 (stirrer only)	0.1	12 x 12 x 5	0.02
Mini w/ Telemodul	50088126	100 V Japan	130-1000	IP68 (stirrer only)	0.1	12 x 12 x 5	0.02
Mini w/ Telemodul	50088118	115 V USA	130-1000	IP68 (stirrer only)	0.1	12 x 12 x 5	0.02
Mini w/ Telemodul 20 C	50088120	100-240 V	130-1400	IP68 (stirrer only)	0.5/0.1/0.15/0.2	12 x 12 x 5	0.02

Operating conditions are -10 to +56°C at 95% rH
100-240 V units contain a cord set with various plugs

Optional Accessories

- Mini stirrer without controller 50088140
- 4-place distributor 50091720
- 8-place distributor 50091721

LINK & SYNC

See page 8.

Controller Choices

The Cimarec i Micro and Mini series stirrers come standard with your choice of controller. Choose the standard Telemodul controller with its space saving design or the Telemodul 20 C with microprocessor controls, adjustable power setting and programmability. Detailed specifications can be found on page 9.



Standard Telemodul Controller



Programmable Telemodul 20 C